


CLASSIC 641 DXX

Made in Germany

TECHNICAL DATA

standard:	acc. to EN 12385-4
lay direction:	ordinary lay, lang lay
surface:	bright, galvanized
inlay:	steel core
outer strand:	6
compacted:	no
strand:	41
length outer wire:	246
fill factor:	0,5916
spinning factor:	0,7739
production tolerance:	-0% / +5%
ECN-category (ISO 4309):	11

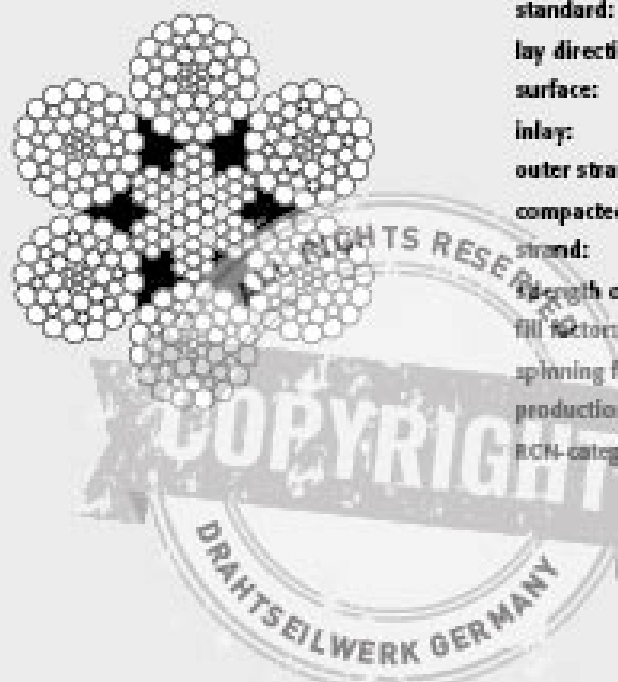

Ø mm	rope weight kg/m	1770 MPa MBL kN	1960 MPa MEL kN	2160 MPa MBL kN
34	4,65	737	816	890
36	5,24	829	918	1012
42	7,11	1126	1247	1374
44	7,89	1249	1384	1524
46	8,53	1350	1495	1634
48	9,32	1476	1634	1801
50	10	1584	1754	1933
51	10,44	1653	1839	2017
52	10,8	1710	1894	2087
54	11,67	1848	2046	2255
55	12,2	1932	2139	2339
56	12,47	1976	2190	2411
58	13,59	2152	2343	2626
60	14,71	2330	2580	2843
62	15,44	2445	2708	2984
64	16,52	2616	2897	3193

 Turn
 page
 →

CLASSIC 641 DXX

Made in Germany

Ø mm	rope weight kg/m	1770 MPa MBL kN	1960 MPa MBL kN	2160 MPa MBL kN
66	17,67	2799	3099	3415
67	18,19	2880	3189	3515
68	18,66	2955	3272	3606
70	19,8	3136	3475	3827
71	20,26	3209	3553	3927
72	21,01	3327	3685	4051
73	21,39	3387	3721	4133
74	22,45	3556	3937	4339
76	23,24	3681	4075	4502
77	24,03	3805	4214	4644
80	26,19	4147	4522	5021
83	28,27	4492	4902	5495
84	28,9	4609	5104	5625
72	21,20	3373	3735	4116
74	22,52	3567	3950	4353
76	23,56	3733	4134	4556
78	25,06	3968	4394	4843
79	25,71	4071	4508	4968
83	28,74	4552	5040	5555
84	29,59	4671	5173	5701