


GABELSEILHÜLSE

OPEN SPELTER SOCKET NEN 2729

mit Bolzen / with pin

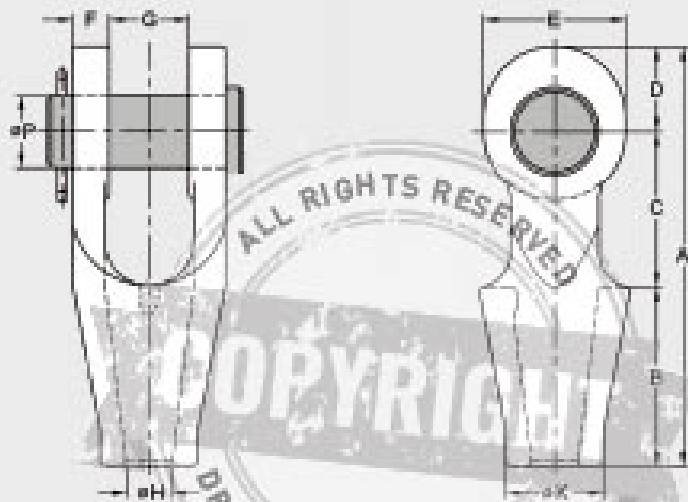

Mutter und Splint / with bolt



Model No.	MBL (Metric)	for whole			approx. (cc)	Dimensions (mm)										Weight kg
		mm	Inch	approx.		A	B	C	D	E	F	G	Ø H	Ø K	Ø P	
OSS 106 P	8	6-7	¼	10	105	46	40	19	34	9,0	18,0	9,5	20,0	17,5	0,4	
OSS 107 P	12	8-10	¼	20	122	57	45	23	40	11,2	20,6	12,5	26,0	20,6	0,6	
OSS 108 P	20	11-13	¾ - 1	35	142	64	51	27	48	12,7	25,6	14,0	30,0	25,4	1,1	
OSS 109 P	25	14-16	¾ - 1	50	171	76	63	32	56	14,5	32,0	17,5	36,5	30,0	1,9	
OSS 100 P	40	18-19	1	80	205	95	75	40	68	16,5	38,0	21,0	46,0	35,0	3,2	
OSS 104 P	55	20-22	1	125	238	101	87	48	80	20,5	45,0	25,5	55,0	41,0	5,3	
OSS 108 P	75	23-26	1	160	273	114	101	57	98	22,5	51,0	28,0	62,0	51,0	8,4	
OSS 111 P	90	27-30	1 ¼	210	306	127	114	65	110	25,0	57,0	32,0	70,0	57,0	11,3	
OSS 115 P	125	31-36	1 ¼ - 1 ½	350	337	139	127	71	122	28,0	63,0	36,0	85,0	63,0	16,0	
OSS 118 P	150	37-39	1 ½	425	394	152	142	80	140	30,0	76,0	41,0	90,0	70,0	23,0	
OSS 120 P	170	40-43	1 ½	500	415	165	165	85	148	33,5	76,0	45,0	97,0	76,0	29,0	
OSS 125 P	225	43-46	1 ½ - 1 ¾	700	467	181	178	95	170	39,0	89,0	51,0	112,0	89,0	43,0	
OSS 128 P	280	46-54	1 ¾ - 2	1250	552	216	228	109	186	46,0	101,0	57,0	125,0	95,0	64,0	
OSS 130 P	360	55-60	2 - 2 ¼	1425	603	225	254	120	210	53,0	113,0	66,0	135,0	108,0	85,0	
OSS 132 P	425	61-68	2 ¼ - 2 ¾	1650	654	235	273	133	230	60,0	127,0	74,0	150,0	121,0	119,0	
OSS 135 P	460	69-75	2 ¾ - 3	1900	696	279	270	138	240	73,0	133,0	79,0	160,0	127,0	158,0	
OSS 138 P	560	76-80	3 - 3 ¼	3400	736	305	286	145	250	76,0	144,0	86,0	170,0	133,0	186,0	
OSS 140 P	625	81-86	3 ¼ - 3 ½	4100	790	330	300	160	275	79,0	159,0	92,0	180,0	140,0	227,0	
OSS 142 P	720	87-93	3 ½ - 3 ¾	5200	840	356	318	175	300	82,0	172,0	98,0	200,0	152,0	280,0	
OSS 144 P	875	94-102	3 ¾ - 4	7700	922	381	343	198	336	89,0	191,0	108,0	215,0	178,0	375,0	