


MASTER 836 KTF

Made in Germany

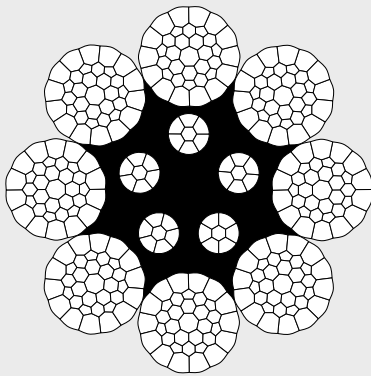

TECHNICAL DATA

standard:	works standard
lay direction:	ordinary lay, lang lay
surface:	bright, galvanized
inlay:	polyamid yarn between outer and core strands
outer strand:	8
compacted:	yes
strand:	36
strength outer wire:	288
fill factor:	0,5982
spinning factor:	0,8401
production tolerance:	0% / +5%
RCN-category (ISO 4309):	13

Ø mm	rope weight kg/m	1770 MPa MBL kN	1960 MPa MBL kN	2160 MPa MBL kN
18	1,38	227	251	277
20	1,68	275	305	336
22	2,06	337	374	412
24	2,43	399	442	487
25	2,64	434	480	529
26	2,89	474	525	578
27	3,05	501	555	611
28	3,28	539	597	658
30	3,79	622	689	759
32	4,38	718	795	876
33	4,58	751	832	916
34	4,89	803	889	980
44	8,48	1392	1542	1699
46	8,89	1459	1615	1780