


# SOLID 119

Made in Germany

## TECHNICAL DATA

standard:	works standard
lay direction:	ordinary lay
surface:	stainless, galvanized
fill factor:	0,7600
spinning factor:	0,9017

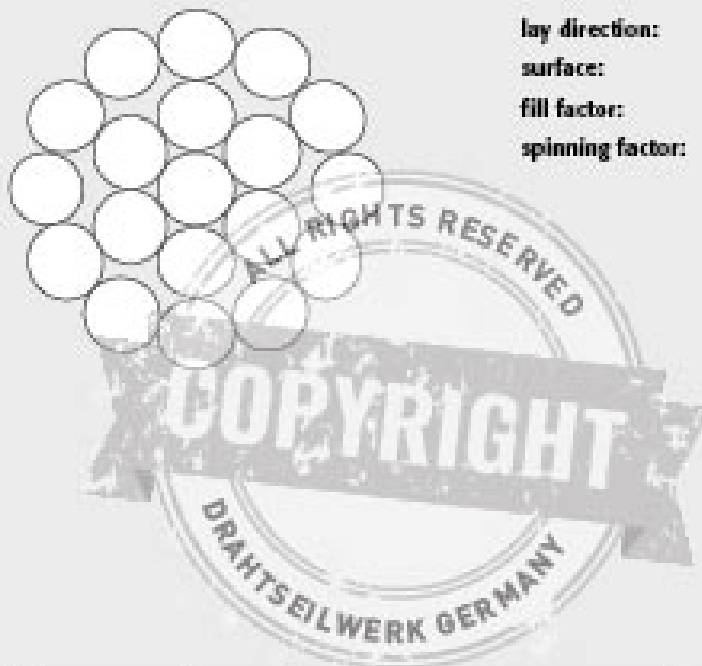

Ø mm	rope weight kg/m	1570 MPa MBL kN	1770 MPa MBL kN
2	0,02	3	4
3	0,05	8	9
4	0,08	14	15
5	0,13	22	24
6	0,18	31	35
7	0,25	42	47
8	0,32	54	61
9	0,42	69	78
10	0,50	85	95
11	0,61	103	116
12	0,72	123	138
13	0,84	146	162
14	0,98	168	189
15	1,13	192	217
16	1,28	219	246
17	1,44	246	278

# SOLID 119

Made in Germany

Ø mm	rope weight kg/m	1570 MPa MBL kN	1770 MPa MBL kN
18	1,63	277	313
19	1,82	300	340
20	2,00	340	385
21	2,21	377	425
22	2,44	415	468
24	2,89	472	535
25	3,13	514	582
26	3,39	560	631
28	3,89	620	704
30	4,49	766	881

