


Made in Germany

SOLID 137

TECHNICAL DATA

standard:	works standard
lay direction:	ordinary lay
surface:	stainless, galvanized
fill factor:	0,75
spinning factor:	0,8812

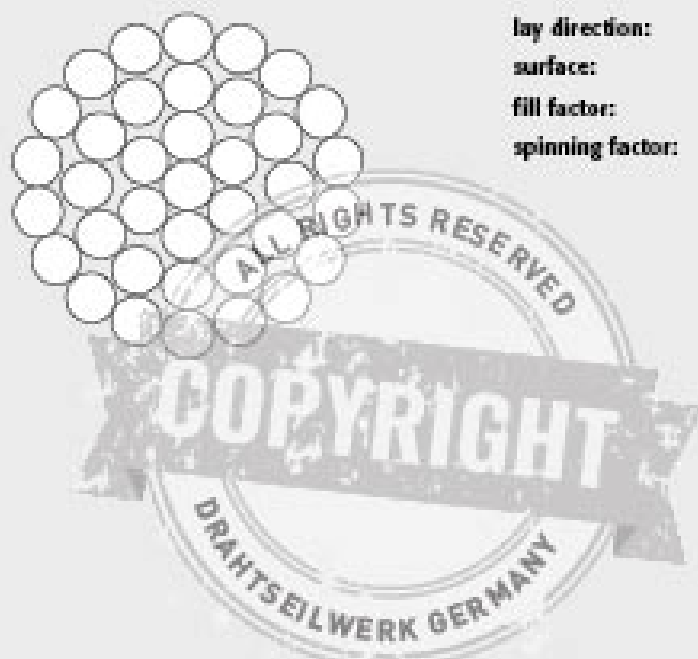

Ø mm	rope weight kg/m	1570 MPa MBL kN	1770 MPa MBL kN
2	0,02	3	4
3	0,04	7	8
4	0,08	13	15
5	0,12	23	29
6	0,18	33	45
7	0,24	45	60
8	0,32	60	77
9	0,41	77	98
10	0,51	98	110
11	0,59	110	132
12	0,70	132	156
13	0,83	156	183
14	0,97	183	210
15	1,12	210	242
16	1,29	242	274
17	1,46	274	

 Turn
 page
 →

SOLID 137

Made in Germany

Ø mm	rope weight kg/m	1570 MPa MBL kN	1770 MPa MBL kN
18	1,59	264	298
19	1,77	296	333
20	2,04	340	383
21	2,18	364	410
22	2,41	401	453
23	2,65	442	498
24	2,89	482	544
25	3,07	511	576
26	3,33	555	625
28	3,89	648	730
29	4,21	702	790
30	4,48	747	842
31	4,82	800	902
32	5,13	855	964
34	5,70	951	1072
35	6,00	1011	1142
36	6,34	1057	1195
38	7,09	1181	1322
40	7,88	1314	1482
42	8,73	1456	1641
43	11,14	1907	2139

