


# MASTER 819 KPX

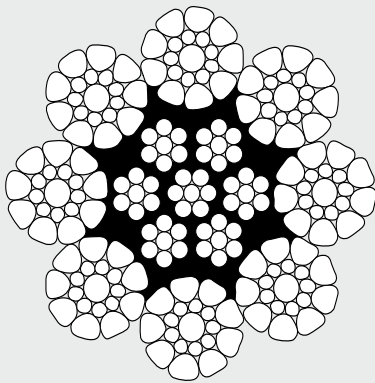

## TECHNICAL DATA

<b>standard:</b>	works standard
<b>lay direction:</b>	ordinary lay
<b>surface:</b>	galvanized
<b>inlay:</b>	steel core
<b>outer strands:</b>	8
<b>strand:</b>	19
<b>strength outer wires:</b>	152
<b>fill factor:</b>	0,675
<b>spinning factor:</b>	0,85
<b>diameter tolerance:</b>	+4%
<b>RCN-category (ISO 4309):</b>	4

## DESCRIPTION

- non rotation resistant
- high breaking strength
- compacted outer strands
- plastic insert

Ø mm	rope weight kg/m	1960 MPa MBL kN	2160 MPa MBL kN
6,5	0,20	36,7	39,9
8	0,33	60,4	65,6
10	0,50	91,8	99,7
11	0,63	117	128
14	0,97	179	195